

CEN 3311 HEAT TRANSFER

2. Heat transfer by conduction (steady-state)

Fourier's law of heat conduction


$$q_x = -k_A A \frac{dT_A}{dx}$$

Where k is thermal conductivity of the wall's material , (W/m.K)

A is area of the Wall, (m²)


x is the heat flow direction , (m)

T is the temperature of the Wall , (°C)

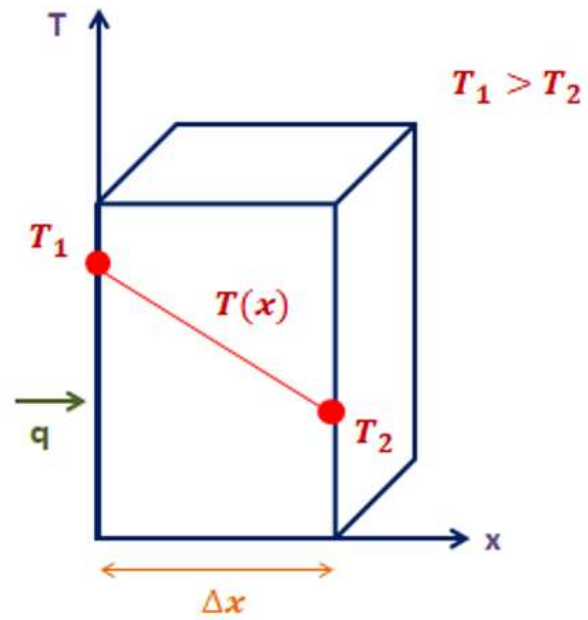

One-dimensional heat transfer by conduction (steady-state cond.)

Example:

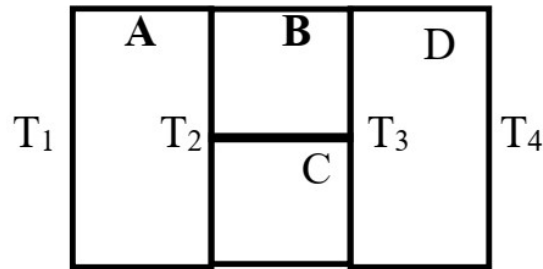

$$q = \frac{T_1 - T_4}{\frac{L_1}{k_A A_A} + \frac{1}{\frac{1}{\frac{L_2}{k_B A_B}} + \frac{1}{\frac{L_3}{k_C A_C}}} + \frac{L_3}{k_D A_D}}$$

$$q = \frac{(573 - 295) K}{\frac{0.1 m}{35 \frac{W}{mK} (0.09 \times 1) m^2} + \frac{1}{\frac{1}{12 \frac{W}{mK} (0.06 \times 1) m^2} + \frac{1}{23 \frac{W}{mK} (0.03 \times 1) m^2}} + \frac{0.08 m}{5 \frac{W}{mK} (0.09 \times 1) m^2}}$$

$$q = \frac{278}{0.031 + 0.07 + 0.177} = 1000 \text{ W}$$

$$\mathbf{b) } q = \frac{(573 - T_{y=10cm}) \text{ K}}{0.1 \text{ m}} = 1000 \text{ W}$$
$$\frac{35 \frac{\text{W}}{\text{mK}} (0.09 \times 1) \text{ m}^2}{}$$

$$(573 - T_{y=10cm}) = 31.7$$

$$T_{y=10cm} = 541.3 \text{ K}$$

$$q = \frac{(573 - T_{y=30cm}) K}{\frac{0.1 m}{35 \frac{W}{mK} (0.09 \times 1) m^2} + \frac{1}{\frac{1}{12 \frac{W}{mK} (0.06 \times 1) m^2} + \frac{1}{23 \frac{W}{mK} (0.03 \times 1) m^2}} + \frac{1}{0.2 m}} = 1000 W$$

$$(573 - T_{y=30cm}) = 101$$

$$T_{y=30cm} = 472 K$$