

MANMADE WATER SOURCES

Man-made sources of water are reservoirs (or dams) and canals (either for irrigation or for transport).


Man-made reservoirs, sometimes called artificial lakes (or dam lakes), are important water sources in many countries. Reservoirs are usually formed by constructing a dam across a river or by diverting a part of the river flow and storing the water in a reservoir. Upon completion of the dam, the river pools behind the dam and fills the artificially created basin. Seasonal changes of runoff and precipitation feed the reservoir. The stored water can be used for irrigation, drinking water after purification or to produce energy (hydroelectrical power plant).




Three Gorges Dam (Yangtze River, Hubei, China)




Yusufeli Dam (Çoruh River, Artvin, Turkey)

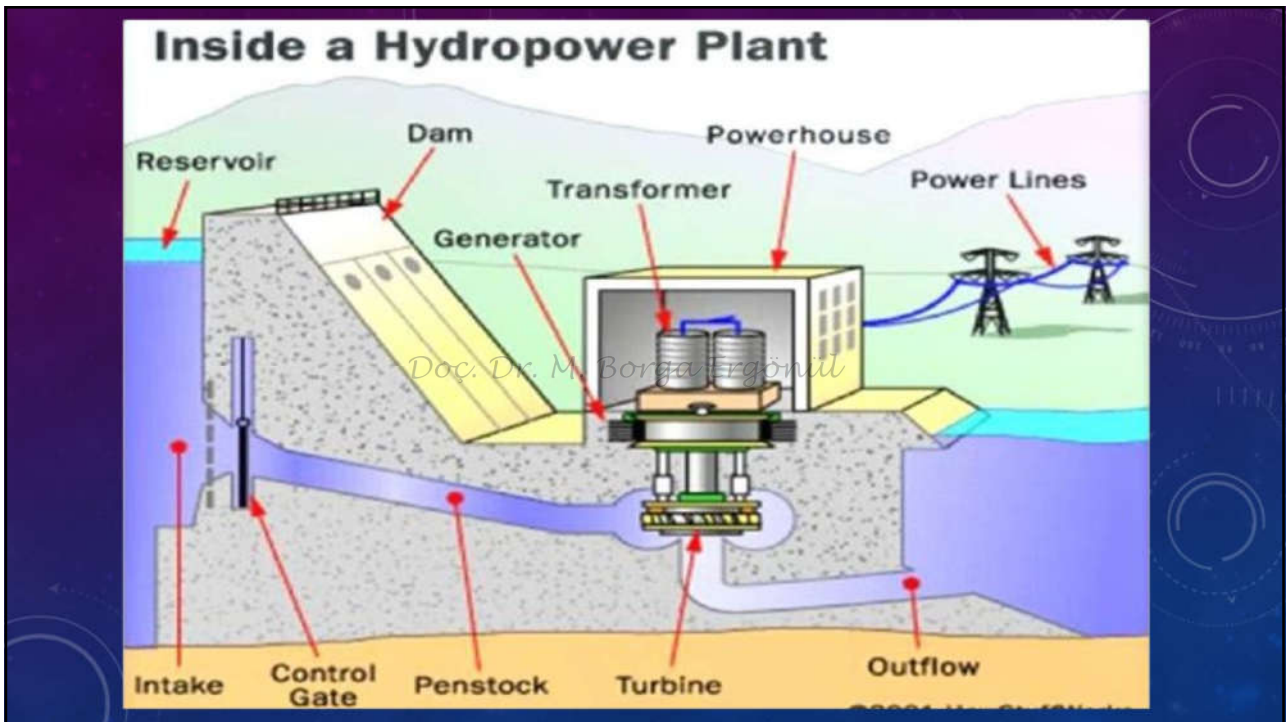

Reservoirs have several effects on the physical, chemical and biological features of the water bodies; both downstream and upstream direction.

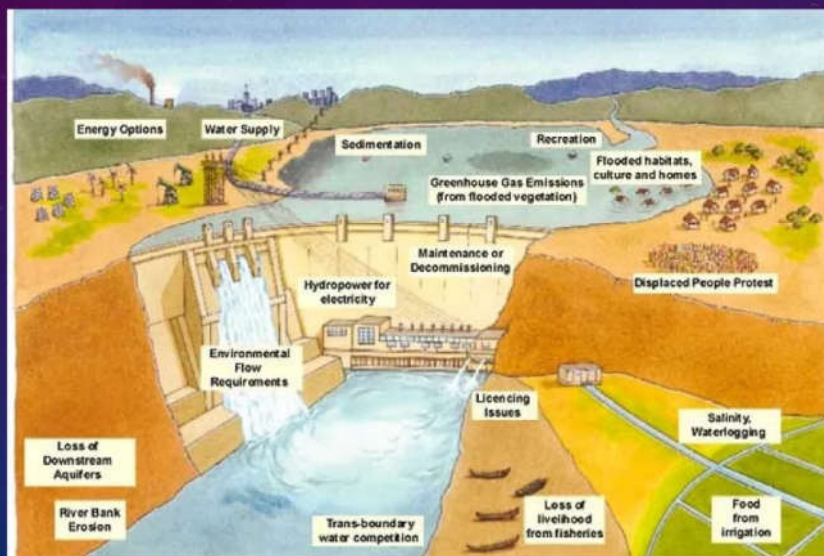

First, we should briefly explain the zones observed in a reservoir to get an idea on what might be affected in or around a dam lake. There are 3 longitudinal zones in a reservoir starting from the riverine, transition and lacustrine zone. There is a gradual difference between those zones mainly based on river flow velocity and depth.

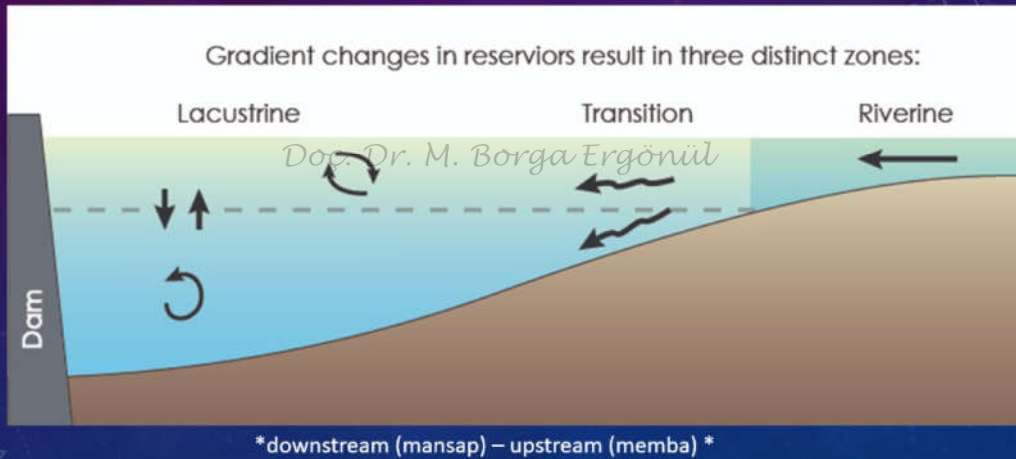

Riverine zone

- Narrow, channelized basin
- Relatively high flow
- High susp. solids, turbid, low light avail, $Z_p < Z_m$
- Nutrient supply by advection, rel. high nutrients
- Light-limited PPR
- Cell losses primarily by sedimentation
- Organic matter supply pri-allochthonous, $P < R$

Transitional zone

- Broader, deeper basin
- Reduced flow
- Reduced susp. solids, less turbid, light avail, increased
- Advective nutrient supply reduced
- PPR/m³ rel. high
- Cell losses by sedimentation and grazing
- Intermediate

Lacustrine zone

- Broad, deep, lake, like basin
- Little flow
- Rel. clear, light more avail, at depth, $Z_p > Z_m$
- Nutrient supply by internal recycling, rel. low nutrients
- Nutrient-limited PPR
- Cell losses primarily by grazing
- Organic matter supply primarily autochthonous, $P > R$

Z_p – Photic depth; Z_m – Mean depth; P – Production; R – Respiration; PPR – Primary production]

Impacts of Dams



Doç. Dr. M. Borga Ergönül

Downstream Impacts

reduced biodiversity; poor water quality; lower crop production; decreased fish populations

Dam

blocked fish migration; disrupted flow of sediments and water; hazards from ageing dams

Reservoir

contributes to global warming; displaces communities; increases water-borne illnesses; triggers earthquakes

A review of the integrated effects of changing climate, land use, and dams on Mekong river hydrology

Y. Pokhrel, M. Burbano, J. Roush, H. Kang, V. Sridhar ... - *Water*, 2018 - mdpi.com

The ongoing and proposed construction of large-scale hydropower dams in the Mekong river basin is a subject of intense debate and growing international concern due to the unprecedented and potentially irreversible impacts these dams are likely to have on the ...

☆ Cited by 83 Related articles All 10 versions Web of Science 50

A method to consider whether dams mitigate climate change effects on stream temperatures

SE. Null, ST. Ligare, JH. Viets - *JAWRA Journal of the American* ... 2013 - Wiley Online Library

This article provides a method for examining mesoscale water quality objectives downstream of dams with anticipated climate change using a multimodel approach. Coldwater habitat for species such as trout and salmon has been reduced by water ...

☆ Cited by 37 Related articles All 7 versions Web of Science 30

Modeling of climate change effects on stream temperatures and fish habitats below dams and near groundwater inputs

BA. Sinokrot, HG. Stefan, JH. McCormick, JG. Eaton - *Climatic Change*, 1995 - Springer

A deterministic heat transport model was developed to calculate stream water temperatures downstream of reservoir outlets (tailwaters) and groundwater sources. The model calculates heat exchange between the atmosphere, the water and the sediments and is driven by ...

☆ Cited by 125 Related articles All 7 versions Web of Science 69

Hydrological effects of dams and water diversions on rivers of Mediterranean-climate regions: examples from California

GM. Kondolf, RJ. Batalla - *Developments in Earth surface processes*, 2005 - Elsevier

Rivers in Mediterranean climate and other semi-arid regions tend to be more heavily impounded and thus their hydrology more strongly affected than rivers in humid climates because demand for water is greater (to supply irrigated agriculture) and runoff is out-of ...

☆ Cited by 74 Related articles All 6 versions

GEOPHYSICAL RESEARCH LETTERS, VOL. 38, L04405, doi:10.1029/2010GL046482, 2011

The influence of large dams on surrounding climate and precipitation patterns

Ahmed Mohamed Degu,¹ Faisal Hossain,¹ Dev Niyogi,² Roger Pielke Sr.,² J. Marshall Shepherd,³ Nathalie Vuicic,³ and Thomas Chronis³



Received 12 December 2010; revised 12 January 2011; accepted 26 January 2011; published 24 February 2011.

[1] Understanding the forcings exerted by large dams on local climate is key to establishing if artificial reservoirs inadvertently modify precipitation patterns in impounded river basins. Using a 30-year record of reanalysis data, the spatial gradients of atmospheric variables related to precipitation formation are identified around the reservoir shoreline for 92 large dams of North America. Our study reports that large dams influence local climate most in Mediterranean, and semi-arid climates, while for humid climates the influence is least apparent. Clear spatial gradients of convective available potential energy, specific humidity and surface evaporation are also observed around the fringes between the reservoir shoreline and farther from these dams because of the increasing correlation observed between CAPE and extreme precipitation percentiles, our findings point to the possibility of storm intensification in impounded basins of the Mediterranean and arid climates of the United States.

[2] While the impact of climate variability and change on artificial reservoirs has been studied at local/regional scales for some time [see, e.g., Hamlet and Lettenmaier, 1999; Christensen et al., 2004], the converse impact of reservoirs on local/regional climate has not been explored as much. It has been recently argued that very little is known on how artificial reservoirs (hereafter interchangeably with 'dam') modify storms under certain atmospheric conditions and the consequential implications on hydrology and dam safety [Hossain et al., 2010; Hossain, 2010]. Dam design in engineering assumes as "stationary" the design parameters of extreme rainfall during its service span, a practice that is

Dams and Climate Change

Dams are very vulnerable to climate change. In addition, they can worsen some negative impacts of climate change, which can reduce the ability of river ecosystems and communities to adapt.

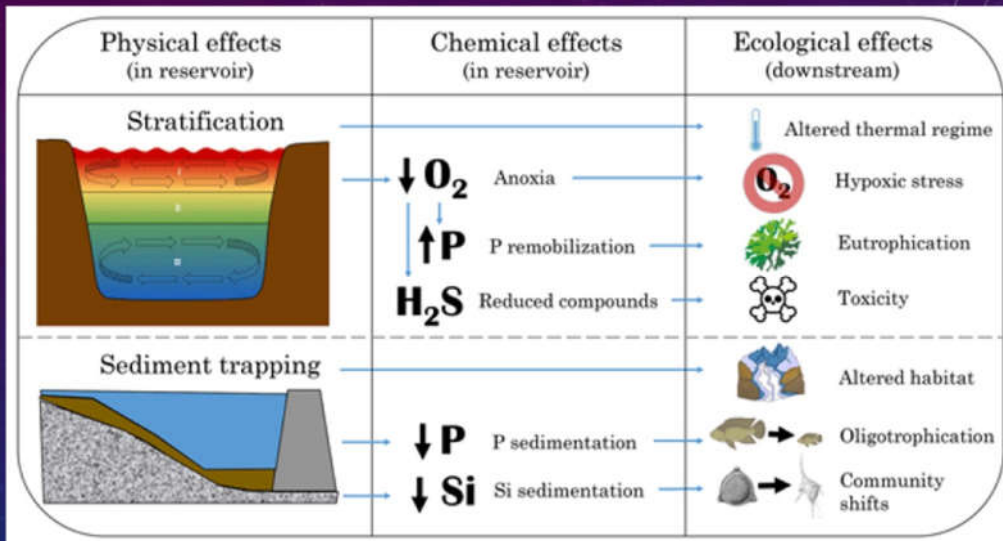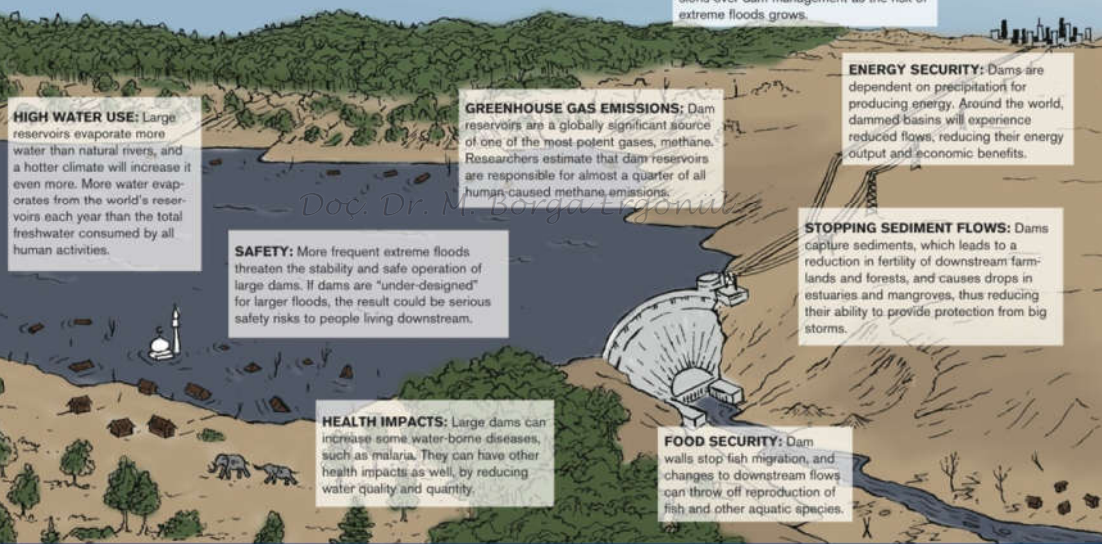


Dams are built to store water but they also store the sediment that all rivers carry. This sediment builds and steadily decreases the storage capacity of the reservoir. Ultimately all dams fill with sediment and might be destroyed by natural floods.

Sedimentation and loss of energy potential within 20 years



More sediments, less energy: The Kalivac reservoir would constantly fill up with sediments, leading to a 2% loss of energy potential each year. After 20 years, the power plant would lack 40% of its original capacity.

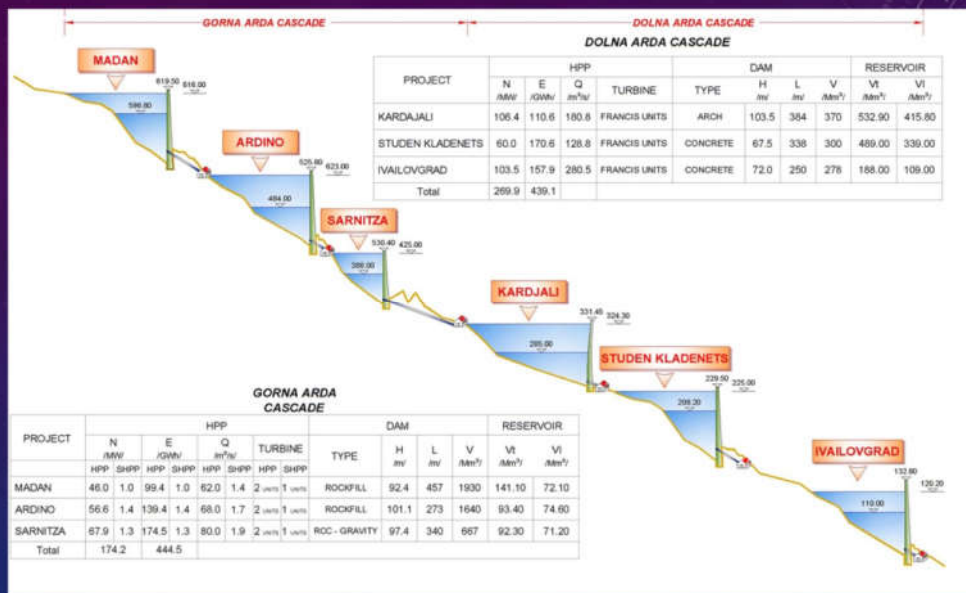

Such effects are multiplied in consecutive dams

One of the main impacts of dams is blocking fish migration. To overcome this problem fish gates or fishways (also called fish ladder) should be constructed on dams.

Fish migrations involve completing a cycle of upstream and downstream movements in lakes and/or rivers which depends on the fish species, fish's life stage, and the type of migration. Generally, downstream migration is a feature of early life stages, while upstream migration is a feature of adult life. Fish migrate to spawn, to feed, and to seek refuge from predators or harmful environmental conditions, such as the complete freeze-up of a stream or lake. Fish are often able to cross natural (e.g. a waterfall) barriers. But man-made (e.g. a dam, weir, or culvert) obstructions block the stream leading to slowdown or totally stop fish migration.



Doc: Dr. M. Borge Ergonull

A fishway is a waterway designed to allow the passage of a single species or a number of different species of fish to past a particular obstruction. While in most cases fishways are built for adult spawners in some cases migrating juveniles are the target species. Delays are critical particularly to adult fish spawning migrations for reproductive success.

Fish passage over dams and weirs or through culverts is an important issue to maintain healthy fish populations. Thus, well designed and constructed fishways is crucial for fish to continue migrating. Biological requirements such as fish behaviour, preferences, migration timing and swimming ability determinant for design and construction of fishways.



Weir



Culvert

There are several fishway designs available mostly involve a lower slope to enable fish to swim up, a flow of water (based on species requirements; fish has a natural instinct to swim towards water splash) and corridors that can be used to take a rest while this energy consuming travel.

INTRODUCTION TO FISHWAY DESIGN

Chris Katopodis, P.Eng.



A paranthesis here: shade balls



WHAT EXACTLY ARE SHADE BALLS?

These floating balls are initially created to prevent birds landing on waterbodies (which include toxic wastes). But in 2008 they were used in USA to prevent the sunlight to reach water. The main objectives of dumping the shade balls into reservoirs is preventing the formation of a carcinogenic chemical, bromate, which forms when naturally occurring bromine reacts with chlorine (used for disinfection) in the presence of sunlight. Other environmental benefits include slow evaporation, prevent algae growth. Although, the main purpose was different, these balls also reduce the evaporation of the reservoir by 85 to 90 percent during warmer seasons. However, shade balls can not used in all reservoirs due to their affect on aquatic life.

Shade ball

It is a small plastic spheres floated on top of a reservoir for environmental protection and to slow evaporation. Usually, the ball diameter is 100 mm.



When it floats on the water surface, it will automatically form nature covering to isolate dust, birds, rainwater and so on, and also stop algae material's Photosynthesis.



Application:

- 1. Prevent Algae Growth without Chemicals
- 2. Odor Control
- 3. Vapor Containment
- 4. Controls Heat Loss and Evaporation

Inland waterways or dredged canals to interconnect seas are defined as navigable water bodies. Inland waterways are usually used for irrigation or navigation of small ships.

